


Casement Window

The System 10 Casement Window offers a clean, contemporary appearance with a modern bevelled design.

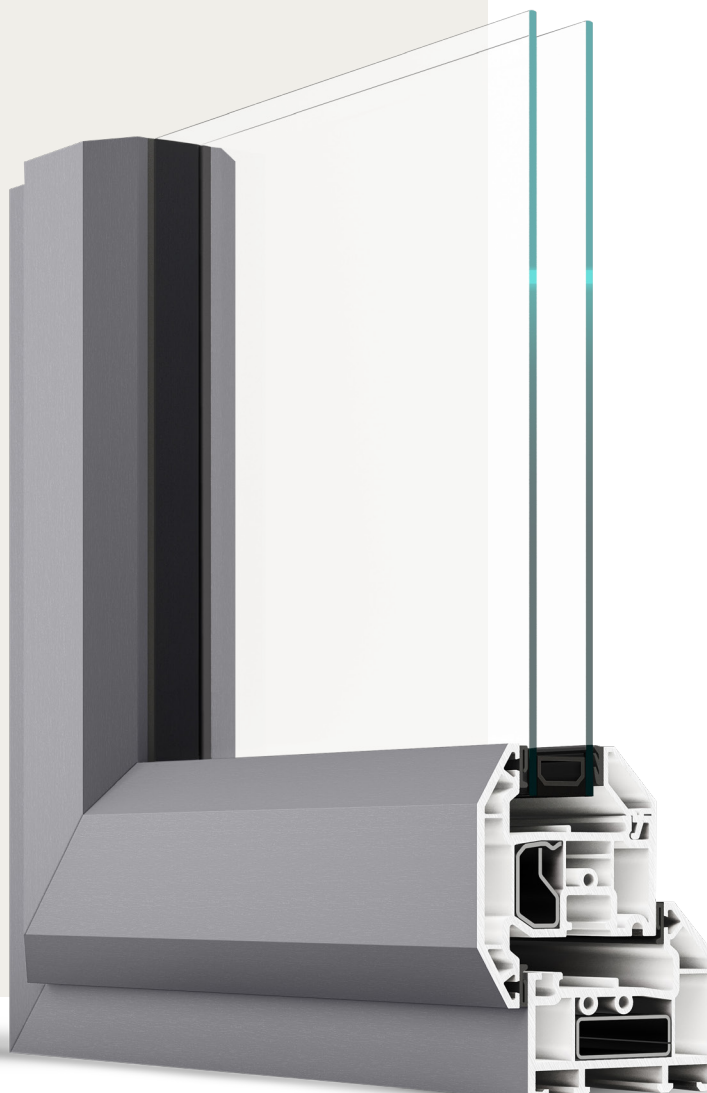

U-Values
with Triple
Glazing as low as:

0.83
W/m²K

U-Values
with Double
Glazing as low as:

1.2
W/m²K

Available in a large
assortment of colours
and woodgrain
options from
the Variations
range

Test Results

Window type: Top hung reinforced

Max sash sizes (wxh)	1400mm x 1400mm
Air permeability	Class 3
Water tightness	Class 7A
Resistance to wind	A3
Exposure category	1200

Window type: Fixed light part reinforced


Max sash sizes (wxh)	3000mm x 3000mm
Air permeability	Class 4
Water tightness	Class E750
Resistance to wind	A4
Exposure category	1600

Window type: Side hung reinforced

Max sash sizes (wxh)	800mm x 1550mm
Air permeability	Class 4
Water tightness	Class 8A
Resistance to wind	A4
Exposure category	1600



Technical Drawing

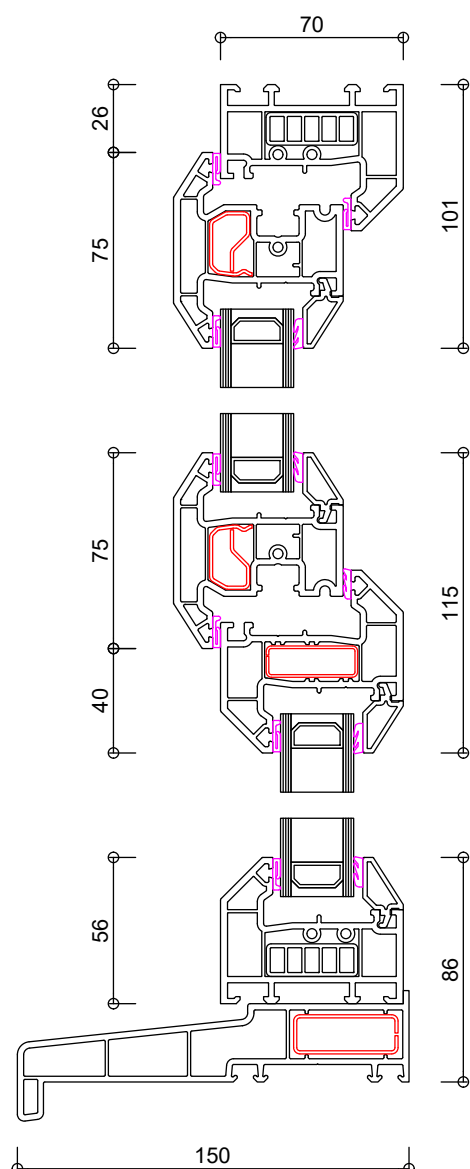

Features and Benefits



Clean, bevelled design

Featuring a simple bevelled edge for a crisp, understated look—well-suited to both new-build and replacement markets.



Ease of fabrication & installation

Compatible with a range of ancillaries and reinforcement options to support efficient fabrication and fitting.



Performance

Designed to meet relevant standards for strength, weather resistance and security.



Flexible configuration

Can be integrated with Halo Rustique allowing for more customised designs.

Maximum sash sizes

Top hung: 1400mm (w) x 1400mm (h)

Side hung: 800mm (w) x 1550mm (h)

Fixed light: 3000mm (w) x 3000mm (h)

Outer frames

56mm, 72mm and 84mm outer frames

Mullions

70mm or 95mm mullions

Sash

75mm casement sash

Glazing beads

- | | |
|-------------------|-------------------|
| • 24mm sculptured | • 32mm sculptured |
| • 24mm bevelled | • 32mm bevelled |
| • 28mm sculptured | • 36mm bevelled |
| • 28mm bevelled | • 40mm bevelled |

Ancillaries

Frame extensions, thermal inserts, cills and weathering trims

Range of coupling options

Range of bay pole options